# **Band-Specific High Power Amplifier**

Product Name: RCA1800H44CWB

Doc. Name: Preliminary Short Spec.

# Preliminary Short Specification for RCA1800H44CWB

1

## RESTRICTION ON USE, DUPLICATION, OR DISCLOSURE OF PROPRIETARY INFORMATION

This document contains proprietary information, which is the sole property of RFcore co., LTD.

The document is submitted to the recipient for his use only.

By receiving this document the recipient undertakes not to duplicate the documents or to disclose in part of, or the whole of, any of the information contained herein to any third party without receiving before hand, written permission from the submitting company.

Created	Printed	Document Number	Revision	Manufacturer
2010/1/13	2017/2/6		Α	RFcore co.,Ltd
File: RCA1800H44CWB Short Spec.docx				

# **Band-Specific High Power Amplifier**

Product Name: RCA1800H44CWB

**Doc. Name: Preliminary Short Spec.** 

### **ELECTRICAL SPECIFICATIONS**

ELECTRICAL SPECIFICATIONS		
Parameter	Specification	Remark
Frequency Range	1805 ~ 1880 MHz	
Saturated Output Power	25 W	Operating Temp.
Small Signal Gain	40 ± 1.0 dB	Input level = -15dBm , Operating Temp.
Gain Flatness	Peak to Peak 2.0 dB	Input level = -15dBm, Over Freq Band, Operating Temp.
Maximum Input Power	7 dBm max	
Input VSWR	Less than 1.5 : 1	
Output VSWR	Less than 1.5 : 1	
DC Input Current	3 A max	@ Pout = 25W Operating Temp.
DC Input Voltage	+27 ± 1.0 Vdc	
RF Input Signal Format	CW	
I/O Map	1. Temperature Monitor	VT={0.02(V) x T(°C)}+1(V)
	2. Power Monitor : Log Slope detector	@CW 44dBm, slope : 0.1VdB Vpin2=4-(44-Pout)x0.1±0.1V
	3, 8. N.C	
	4. Reflect Power Monitor	Vpin4=1.4V±0.1V Reflect power=39.5±1.5dBm
	5. VSWR Fail Alarm	38dBm <reflect power<41dbm<="" td=""></reflect>
	6. Vcc +27V	
_	7. GND	
	9. Enable (Active low)	pulled-up@5V with 10KΩ

# **ENVIRONMENTAL SPECIFICATIONS**

Parameter	Specification	Remark
Operating Ambient Temperature	-20 ~ 60 °C	
Storage Temperature	-40 ~ 80 °C	

# **MECHANICAL SPECIFICATIONS**

Parameter	Specification	Remark
Dimension	110 x 90 x 22 mm	
RF Input / Output Connector	SMA – Female	
DC & Interface Connector	D – Sub 9 Pin Male	

Created	Printed	Document Number	Revision	Manufacturer
2010/1/13	2017/2/6		Α	RFcore co.,Ltd
File: RCA1800H44CWB Short Spec.docx				


The Specifications is subject to change before finalization

# **Band-Specific High Power Amplifier**

Product Name: RCA1800H44CWB

**Doc. Name: Preliminary Short Spec.** 

# MECHANICAL DRAWING

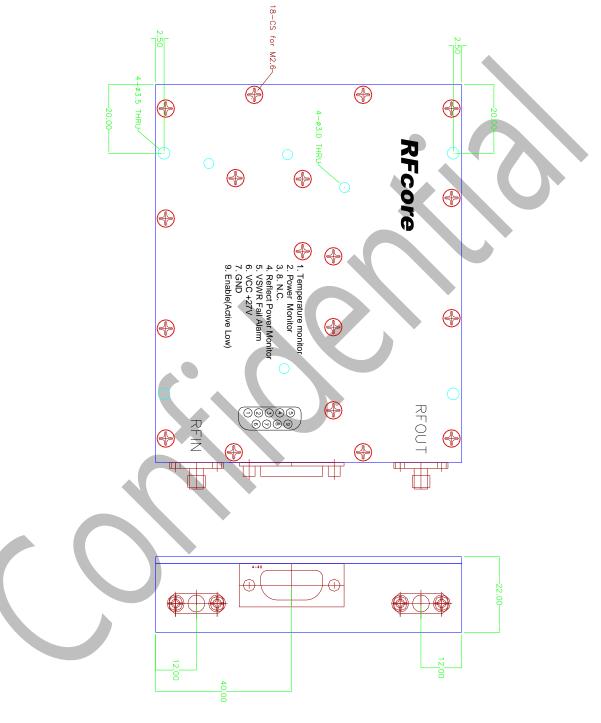

Created	Printed	Document Number	Revision	Manufacturer
2010/1/13	2017/2/6		А	RFcore co.,Ltd
File: RCA1800H44CWB Short Spec.docx				