

Broadband High Power Amplifier

Product Name : RCA18-22H46CWB, Code Name : B1Y6SD3UI45

Doc. Name : General Spec.

<p style="text-align: center;">General Specification for RCA18-22H46CWB</p>

1

<p style="text-align: center;">RESTRICTION ON USE, DUPLICATION, OR DISCLOSURE OF PROPRIETARY INFORMATION</p>

This document contains proprietary information, which is the sole property of RFcore co., LTD.

The document is submitted to the recipient for his use only.

By receiving this document the recipient undertakes not to duplicate the documents or to disclose in part of, or the whole of, any of the information contained herein to any third party without receiving before hand, written permission from the submitting company.

Created	Printed	Document Number	Revision	Manufacturer
2010/9/1	2017/2/6		B	RFcore co.,Ltd
File : RCA18-22H46CWB General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

<http://www.rfcore.com>

Broadband High Power Amplifier

Product Name : RCA18-22H46CWB, Code Name : B1Y6SD3UI45

Doc. Name : General Spec.

ELECTRICAL SPECIFICATIONS		@ 50 Ohms load, 27 Vdc, Tc = 35 °C
Parameter	Specification	Remark
Frequency Range	1800 ~ 2200 MHz	
Saturated Output Power	46 dBm	@ CW, Tcase = 35°C
Small Signal Gain	45 ± 1.5 dB	Input Level = - 15 dBm, Tcase = 35°C
Gain Flatness	Peak to Peak 3 dB	Input Level = - 15 dBm, Over Freq. band
Input VSWR	2 : 1 max	
Output VSWR	2 : 1 max	
DC Input Voltage	27 ± 1.0 Vdc	
Current Consumption	4.2 A max. 3.9 A typ.	

Interface Pin Description		
Connector	Description	Specification
I/O Interface(D-Sub 9Pin Male)	1. Temperature Monitor	VT = 0.02*T + 1.0 (V) T is Case Temperature in degC ± 5°C
	2. Power Monitor	Log slope detector
	3. GND	
	4. Reflected Power Monitor	Diode type detector
	5. VSWR Fail Alarm	High(5V) When Vpin4>1.4±0.1 V
	6. Vcc	
	7. Vcc	
	8. GND	
	9. Enable(Active Low)	Pulled-up @ 5V with 10kohm

ENVIRONMENTAL SPECIFICATIONS		
Parameter	Specification	Remark
Operating Case Temperature	-20 ~ +60 °C	
Storage Temperature	-40 ~ +85 °C	

MECHANICAL SPECIFICATIONS		
Parameter	Specification	Remark
Dimension	110 * 90 * 22 mm	
Input / Output Connector	SMA Female	
Control Connector	D-Sub 9Pin Male	
Cooling	Adequate Heat-sink required	

Created	Printed	Document Number	Revision	Manufacturer
2010/9/1	2017/2/6		B	RFcore co.,Ltd
File : RCA18-22H46CWB General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com


http://www.rfcore.com

Broadband High Power Amplifier

Product Name : RCA18-22H46CWB, Code Name : B1Y6SD3UI45

Doc. Name : General Spec.

MECHANICAL DRAWING

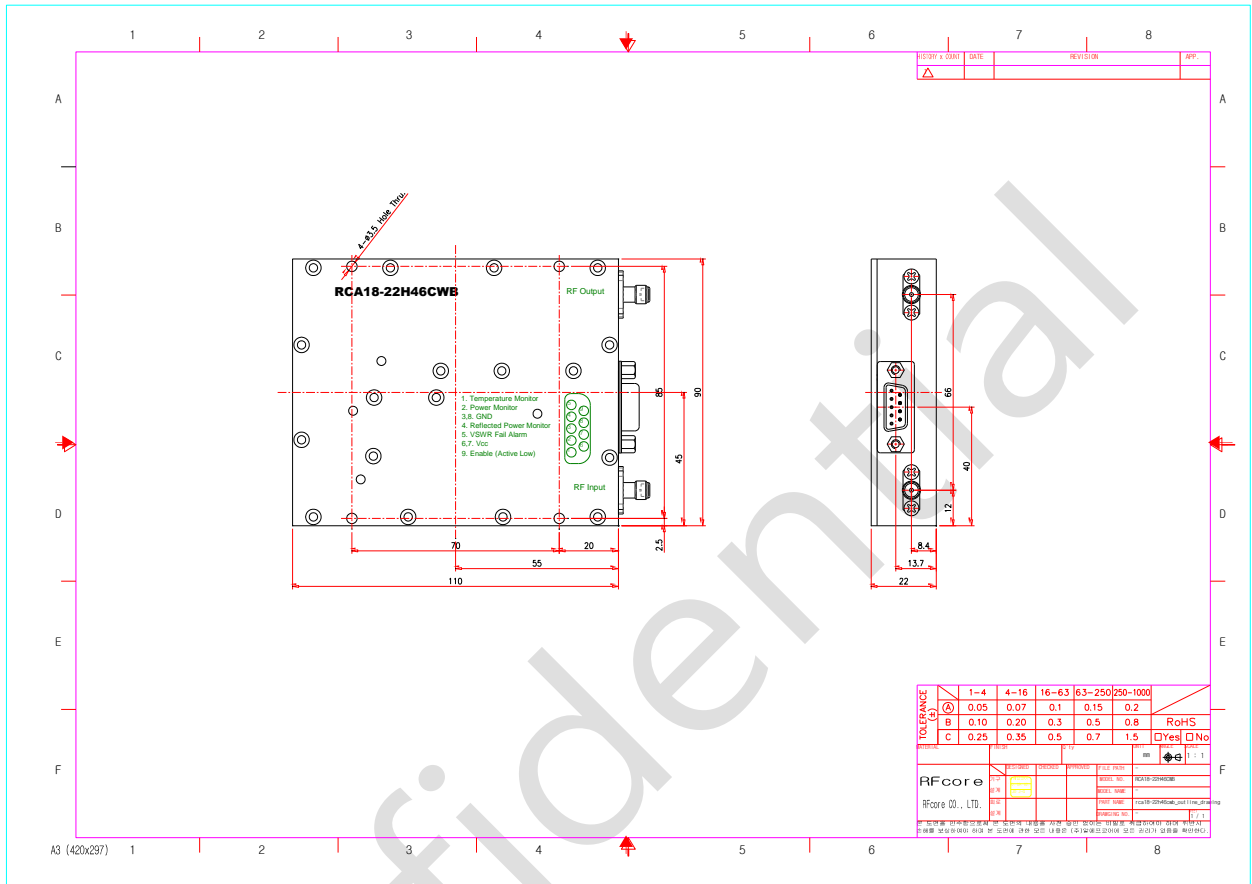

3

Created	Printed	Document Number	Revision	Manufacturer
2010/9/1	2017/2/6		B	RFcore co.,Ltd
File : RCA18-22H46CWB General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

http://www.rfcore.com