

Broadband High Power Amplifier

Product Name : RCA002053H50G, Code Name :

Doc. Name : General Spec.

<p style="text-align: center;">General Specification for RCA002053H50G</p>
--

1

<p style="text-align: center;">RESTRICTION ON USE, DUPLICATION, OR DISCLOSURE OF PROPRIETARY INFORMATION</p> <p>This document contains proprietary information, which is the sole property of RFcore co., LTD. The document is submitted to the recipient for his use only. By receiving this document the recipient undertakes not to duplicate the documents or to disclose in part of, or the whole of, any of the information contained herein to any third party without receiving before hand, written permission from the submitting company.</p>

Created	Printed	Document Number	Revision	Manufacturer
2014/6/24	2014/7/9		A	RFcore co.,Ltd
File : RCA002053H50G General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

<http://www.rfcore.com>

Broadband High Power Amplifier


Product Name : RCA002053H50G, Code Name :

Doc. Name : General Spec.

ELECTRICAL SPECIFICATIONS		@ 50 Ohms load, 28Vdc, Tc = 35 °C
Parameter	Specification	Remark
Frequency Range	20 ~ 530 MHz	
Saturated Output Power	20-530MHz : 50 dBm min	@ CW, 50 ohm load
Output Power at 1dB Compression Point	47 dBm min.	@ CW
Small Signal Gain	50dB min	@ Input = -15dBm
Gain Flatness	± 1.5 dB	@ Input = 0dBm
Input Power for no damage on DC ON	10dBm max	@ 50 ohm load
Harmonics output@ Pout = 100W	2 nd : Min 13dBc 3 rd : Min 11dBc	
Spurious Signals	70dBc typ, 60dBc min.	
Input VSWR	Less than 1.5 : 1	
Maximum Output Load Condition for survival	Infinite VSWR	
On/Off Switching Time	2 usec typ.	Typical off -> on : 1.5 usec on -> off : 0.6 usec
DC Input Voltage	+28V	Working with degraded performance down to 20V
Current Consumption	8A typ. , 9.0A max	Efficiency > 40% @ 100W @50 Ohm load
RF Input Signal Format	CW, FM, AM, pulse etc.	

2

Block diagram

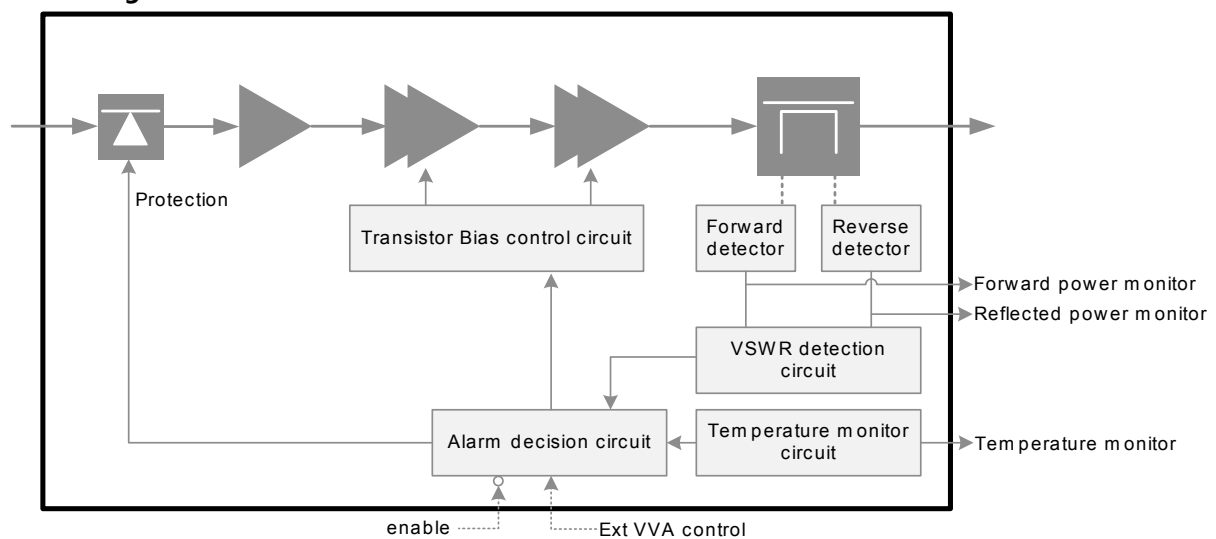

Created	Printed	Document Number	Revision	Manufacturer
2014/6/24	2014/7/9		A	RFcore co.,Ltd
File : RCA002053H50G General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

http://www.rfcore.com

Broadband High Power Amplifier

Product Name : RCA002053H50G, Code Name :

Doc. Name : General Spec.

I/O Interface		
Parameter	Specification	Remark
I/O Map (D-SUB HD)	1. GND	
	2. External VVA Control	Refer to Figure 1.
	3. VSWR Fail Alarm	TTL HIGH(5V)
	4. Temperature Monitor	$V_T = 0.01 V \times T_c(^{\circ}C) + 0.5V$ $T = \text{Case Temperature} \pm 5^{\circ}C$
	5. Do not connect	
	6. Shutdown	TTL Logic "High" : Amp. Disable TTL Logic "Low" or pin is opened : Amp. Enable (Internally pulled-down)
	7. Do not connect	
	8. Forward Power Monitor	Logarithmic Detector(0.05V/dB)
	9. Reflected Power Monitor	Logarithmic Detector(0.05V/dB)
	10. Vdc	
	11. Vdc	
	12. Vdc	
	13. GND	
	14. GND	
	15. GND	

3

* Typical attenuation performance with using Ext. VVA control pin

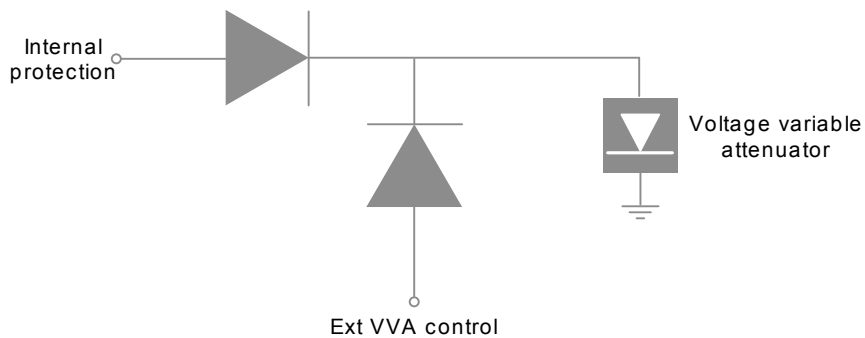


Figure 1. External VVA control pin block diagram

Created	Printed	Document Number	Revision	Manufacturer
2014/6/24	2014/7/9		A	RFcore co.,Ltd
File : RCA002053H50G General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

http://www.rfcore.com

Broadband High Power Amplifier

Product Name : RCA002053H50G, Code Name :

Doc. Name : General Spec.

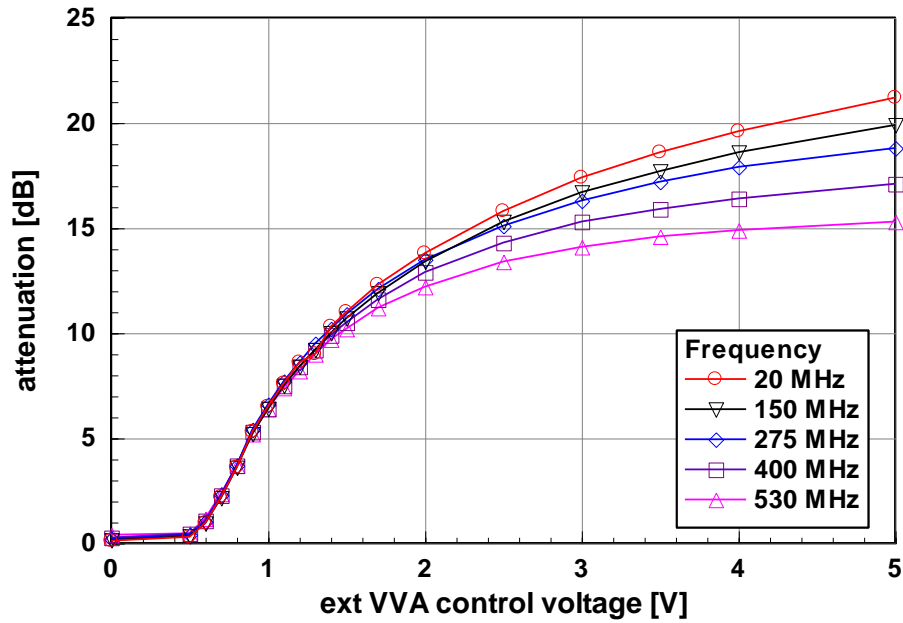


Figure 2. Ext. VVA control pin VS Attenuation (Typical)

4

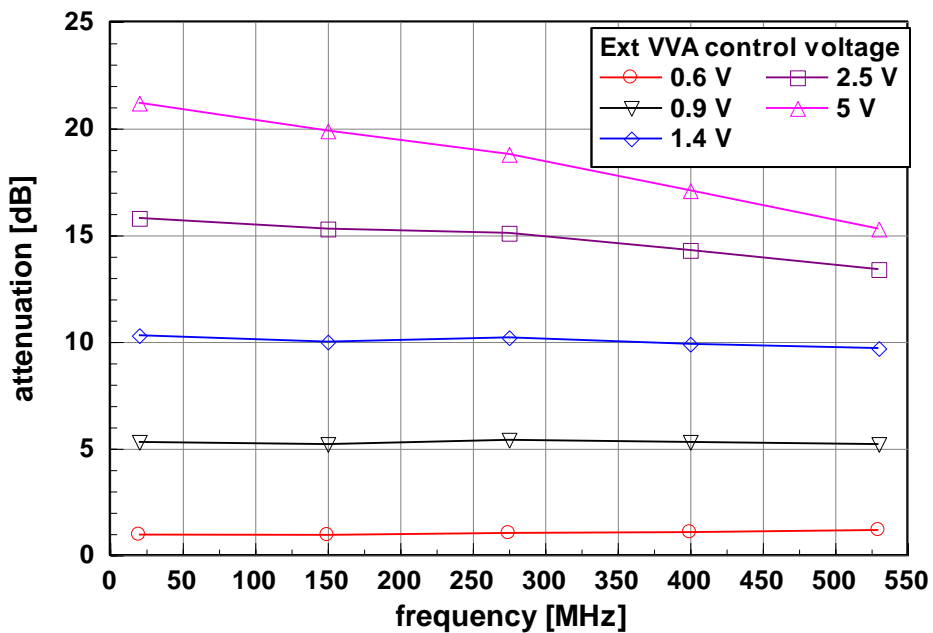


Figure 3. Frequency VS Attenuation (Typical)

Created	Printed	Document Number	Revision	Manufacturer
2014/6/24	2014/7/9		A	RFcore co.,Ltd
File : RCA002053H50G General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

http://www.rfcore.com

Broadband High Power Amplifier

Product Name : RCA002053H50G, Code Name :

Doc. Name : General Spec.

** Typical detector performance

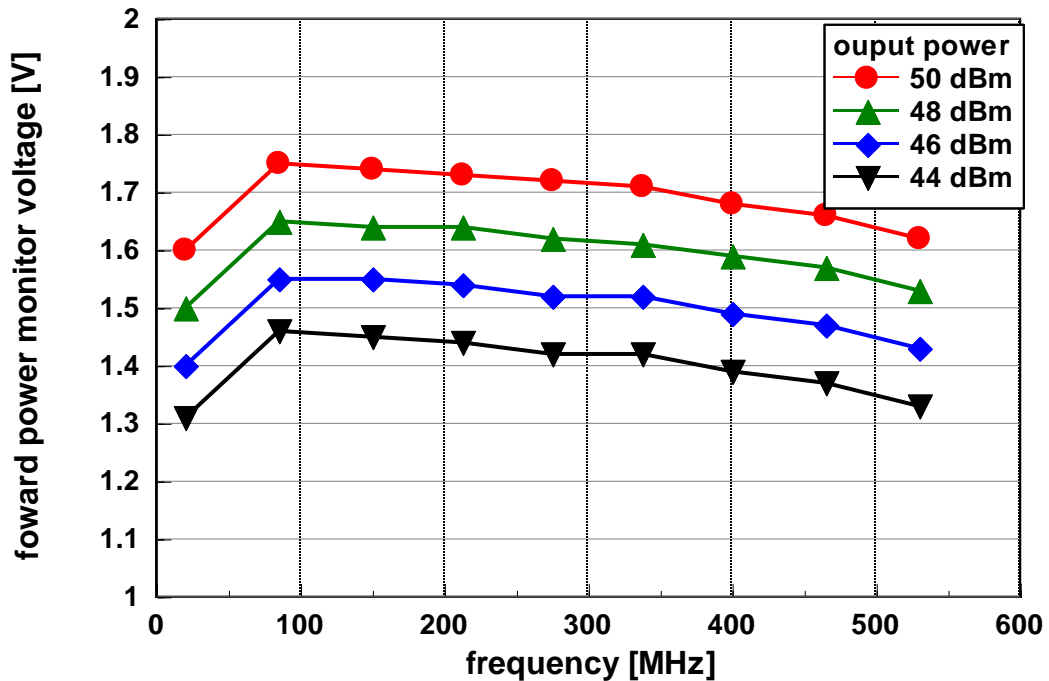


Figure 4. frequency VS forward power monitor voltage (typical)

5

Detector voltage = 0.05V/dB, detector flatness \leq 3dB.

Detector stability : TBD (has temperature deviation)

** Internal protection

The VSWR fail protection activates when the output is connected VSWR >5:1 load :

- Typical 10dB back-off

The Over temp protection :

- The PA is disable state when temperature becomes around 85°C, then, The PA is enable state when it becomes around 65°C.

ENVIRONMENTAL SPECIFICATIONS		(Design to meet)		
Parameter	Specification	Remark		
Operating Case Temperature	-20 ~ +80 °C			
Storage Temperature	-30 ~ +85 °C			
Vibration	MIL-STD-810F – Method 514.5 – Proc I Category 13	Airborne		
Shock	MIL-STD-810F – Method 516.5 – Proc I	Airborne		
Relative Humidity (Non-Condensing)	MIL-STD-810F – Method 507.4			
Altitude	MIL-STD-810F – Method 500.4 – Proc II			
Created	Printed	Document Number	Revision	Manufacturer
2014/6/24	2014/7/9		A	RFcore co.,Ltd
File : RCA002053H50G General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

http://www.rfcore.com

Broadband High Power Amplifier



Product Name : RCA002053H50G, Code Name :

Doc. Name : General Spec.

MECHANICAL SPECIFICATIONS

Parameter	Specification	Remark
Dimension	170 X 81 X 27 mm	
RF Input Connector	SMA – Female	
RF Output Connector	SMA – Female	
DC & Interface Connector	D-Sub(HD) 15Pin Male	
Cooling	Adequate Heat-sink required	

MECHANICAL DRAWING

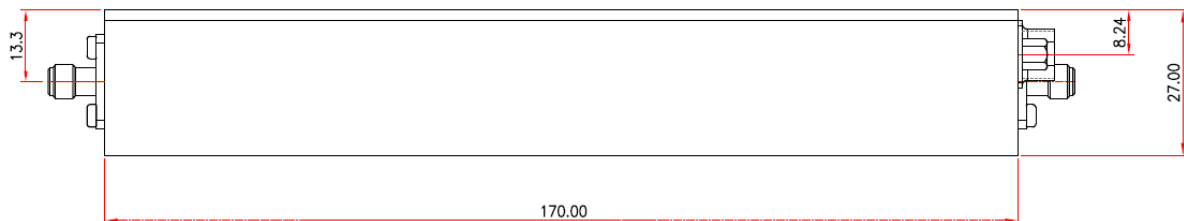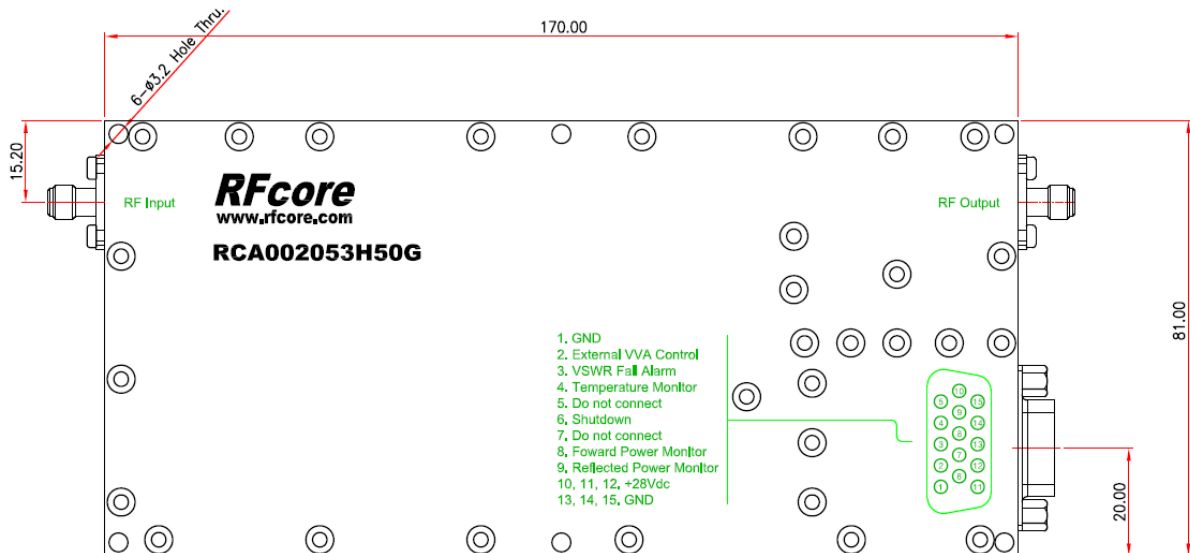

Created	Printed	Document Number	Revision	Manufacturer
2014/6/24	2014/7/9		A	Rfcore co.,Ltd
File : RCA002053H50G General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

http://www.rfcore.com