

# Broadband High Power Amplifier

Product Name : RCA0525H47D, Code Name : B3Y6SD3EN5048

Doc. Name : Preliminary Short Spec.

---

**Preliminary Short Specification  
for  
RCA0525H47D**

1

**RESTRICTION ON USE, DUPLICATION, OR DISCLOSURE OF PROPRIETARY INFORMATION**

This document contains proprietary information, which is the sole property of RFcore co., LTD.  
The document is submitted to the recipient for his use only.

By receiving this document the recipient undertakes not to duplicate the documents or to disclose in part of, or the whole of, any of the information contained herein to any third party without receiving before hand, written permission from the submitting company.

Created	Printed	Document Number	Revision	Manufacturer
2011/7/18	2011/7/18		A	<i>RFcore co.,Ltd</i>
File : RCA0525H47D Short Spec.docx				

*The Specifications is subject to change before finalization*

Customer Service: Tel. 82-31-708-7575

Email: [sales@rfcore.com](mailto:sales@rfcore.com)

<http://www.rfcore.com>

# Broadband High Power Amplifier

Product Name : RCA0525H47D, Code Name : B3Y6SD3EN5048

Doc. Name : Preliminary Short Spec.

ELECTRICAL SPECIFICATIONS		@ 50 Ohms load, 28 Vdc, Tc ≅ 35 °C
Parameter	Specification	Remark
Frequency Range	500 ~ 2500 MHz	
Saturated Output Power	50 W typ.	40W min.
Small Signal Gain	48 dB min.	Input Power = -15dBm
Small Signal Gain Flatness	Peak to Peak 6.0 dB	Input Power = -15dBm
Input VSWR	Less than 2 : 1	
Maximum Input Power	10 dBm	
Signal Format	CW	
DC Current Consumption	6.0 A typ.	@ Pout = 40W
DC Input Voltage	28 ± 1.0Vdc	
I/O Map	<ol style="list-style-type: none"> <li>1. Enable (Active Low)</li> <li>2. Forward Power Monitor</li> <li>3. Fast Back-off</li> <li>4. Do not connect</li> <li>5. Temperature Monitor</li> <li>6, 7. Vcc</li> <li>8,9. GND</li> </ol>	<p>pulled-up @ 5V with 10k ohm</p> <p>Vpin2 is Output voltage of diode detector. It has non-log slope characteristic.</p> <p>5V(Back-off by 20~30dB), 0V(Normal Gain)</p> <p>VT = (0.02V * Temp°C)+1V</p>

2

ENVIRONMENTAL SPECIFICATIONS		
Parameter	Specification	Remark
Operating Case Temperature	-20 ~ 60 °C	
Storage Temperature	-40 ~ 85 °C	

MECHANICAL SPECIFICATIONS		
Parameter	Specification	Remark
Dimension	145 x 95 x 25 mm	
RF Input / Output Connector	Input : SMA – Female Output : SMA -Female	
DC Power & Interface Connector	D-Sub 9Pin Male	

Created	Printed	Document Number	Revision	Manufacturer
2011/7/18	2011/7/18		A	RFcore co.,Ltd
File : RCA0525H47D Short Spec.docx				


The Specifications is subject to change before finalization

# Broadband High Power Amplifier

Product Name : RCA0525H47D, Code Name : B3Y6SD3EN5048

Doc. Name : Preliminary Short Spec.

## MECHANICAL DRAWING

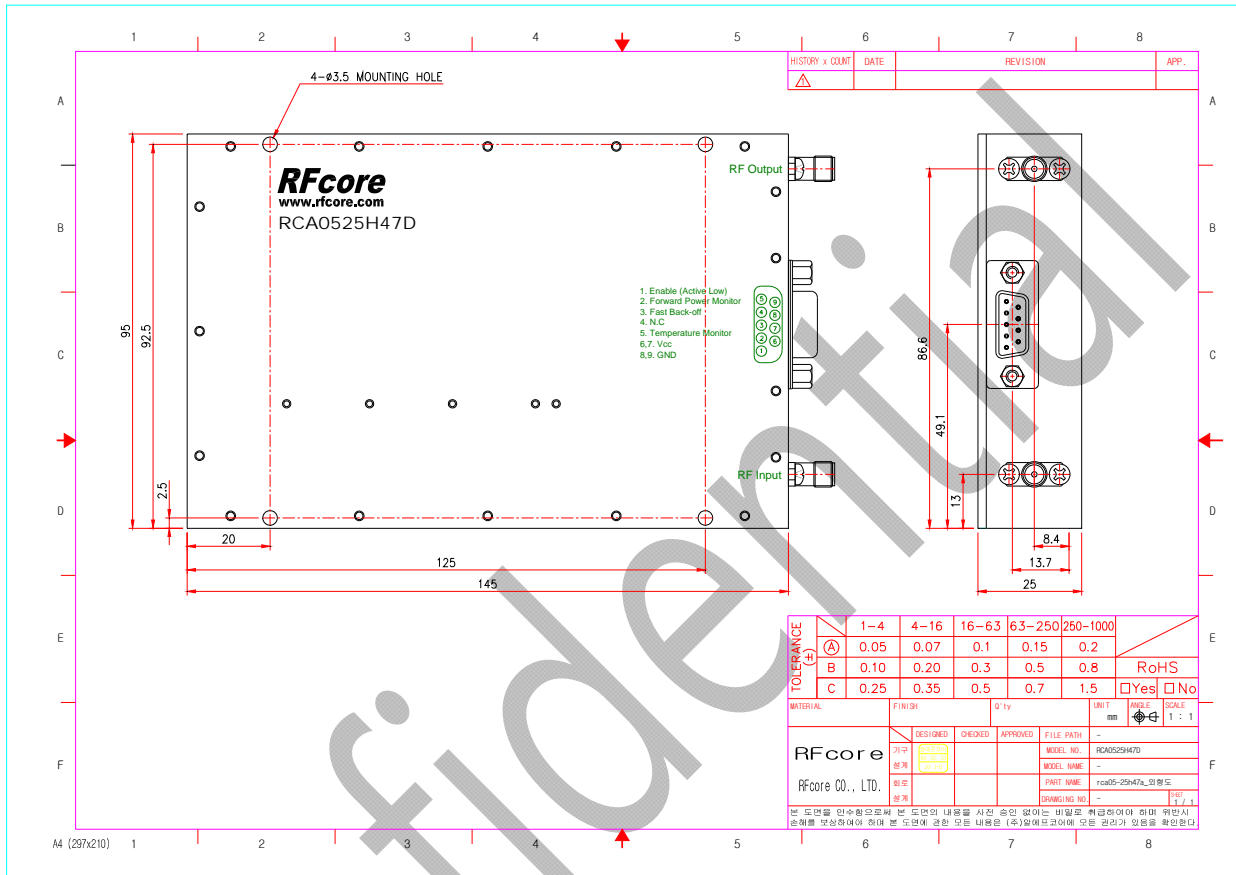

Created	Printed	Document Number	Revision	Manufacturer
2011/7/18	2011/7/18		A	RFcore co.,Ltd
File : RCA0525H47D Short Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

http://www.rfcore.com