

Broadband High Power Amplifier

Product Name : RCA0530H47D1, Code Name :

Doc. Name : General Spec.

<p style="text-align: center;">General Specification for RCA0530H47D1</p>

1

<p style="text-align: center;">RESTRICTION ON USE, DUPLICATION, OR DISCLOSURE OF PROPRIETARY INFORMATION</p> <p>This document contains proprietary information, which is the sole property of Rfcore co., LTD. The document is submitted to the recipient for his use only. By receiving this document the recipient undertakes not to duplicate the documents or to disclose in part of, or the whole of, any of the information contained herein to any third party without receiving beforehand, written permission from the submitting company.</p>
--

Created	Printed	Document Number	Revision	Manufacturer
2016/2/16	2017/1/12		A	Rfcore co.,Ltd
File : RCA0530H47D1 General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

<http://www.rfcore.com>

Broadband High Power Amplifier

Product Name : RCA0530H47D1, Code Name :

Doc. Name : General Spec.

ELECTRICAL SPECIFICATIONS		@ 50 Ohms load, 28 Vdc, Tc = 35 °C
Parameter	Specification	Remark
Frequency Range	500 ~ 3000 MHz	
Saturated Output Power	50 W typ. 40W min.	@ CW
Small Signal Gain	48 dB min.	Input Power = -15dBm
Small Signal Gain Flatness	Peak to Peak 6.0 dB	Input Power = -15dBm
Maximum Input Power for no damage	10 dBm	
Input VSWR	Less than 2 : 1	
DC Input Voltage	28 ± 1.0Vdc	
Current Consumption	7.0 A max. 6.0 A typ.	@ Pout = 40W
I/O Interface (D-Sub 9Pin Male)	<ol style="list-style-type: none"> 1. Enable (Active Low) 2. Forward Power Monitor 3. Do not connect 4. Reflected Power Monitor 5. Temperature Monitor 6. Vcc 7. Vcc 8. GND 9. GND 	<p>pulled-up @ 5V with 10k ohm</p> <p>Logarithmic Detector(0.05V/dB)</p> <p>Logarithmic Detector(0.05V/dB)</p> <p>VT= 10(mV) * Tc(°C) + 500(mV), Tc = Case Temperature ± 5°C</p>

2

ENVIRONMENTAL SPECIFICATIONS		
Parameter	Specification	Remark
Operating Case Temperature	-30 ~ +75 °C	
Storage Temperature	-40 ~ +85 °C	

Created	Printed	Document Number	Revision	Manufacturer
2016/2/16	2017/1/12		A	RFcore co.,Ltd
File : RCA0530H47D1 General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

http://www.rfcore.com

Broadband High Power Amplifier


Product Name : RCA0530H47D1, Code Name :

Doc. Name : General Spec.

MECHANICAL SPECIFICATIONS

Parameter	Specification	Remark
Dimension	145 * 95 * 25 mm	
Weight	Less than 650 g	
RF Input Connector	SMA Female	
RF Output Connector	SMA Female	
I/O Interface Connector	D-Sub 9Pin Male	
Cooling	Adequate Heat-sink required	

MECHANICAL DRAWING

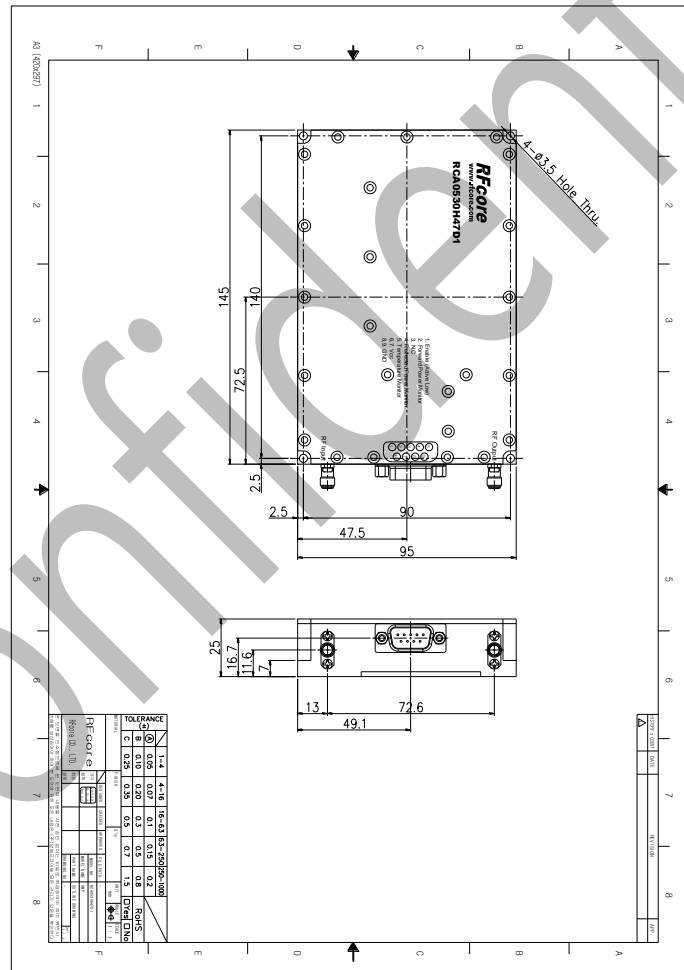

DRAWING REFERNECE: This is subject to change without notice.

Created	Printed	Document Number	Revision	Manufacturer
2016/2/16	2017/1/12		A	RFcore co.,Ltd
File : RCA0530H47D1 General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

http://www.rfcore.com