

Broadband High Power Amplifier

Product Name : RCA0727H49C

Doc. Name : Preliminary Short Spec.

<p style="text-align: center;">Preliminary Short Specification for RCA0727H49C</p>
--

1

<p style="text-align: center;">RESTRICTION ON USE, DUPLICATION, OR DISCLOSURE OF PROPRIETARY INFORMATION</p> <p>This document contains proprietary information, which is the sole property of Rfcore co., LTD. The document is submitted to the recipient for his use only. By receiving this document the recipient undertakes not to duplicate the documents or to disclose in part of, or the whole of, any of the information contained herein to any third party without receiving before hand, written permission from the submitting company.</p>

Created	Printed	Document Number	Revision	Manufacturer
2014/12/11	2017/1/12		B	Rfcore co.,Ltd
File : RCA0727H49C Short Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

<http://www.rfcore.com>

Broadband High Power Amplifier

Product Name : RCA0727H49C

Doc. Name : Preliminary Short Spec.

ELECTRICAL SPECIFICATIONS		@ 50 Ohms load, 28 Vdc, Tc = 35 °C
Parameter	Specification	Remark
Frequency Range	700 ~ 2700 MHz	
Saturated Output Power	49 dBm min.	@ CW
Small Signal Gain	49 dB min.	Input Power = -15dBm
Gain Flatness	Peak to Peak 6.0 dB	Input Power = 0dBm
Maximum Input Power for no damage	7 dBm max.	
Input VSWR	Less than 2 : 1	
DC Input Voltage	28 ± 1.0 Vdc	
Current Consumption	14 A max. 12 A typ.	@ Pout = 49 dBm
I/O Interface (7W2 Male)	1. Enable (Active Low)	Pulled-up @ 5V with 10k ohm
	2. Forward Power Monitor	Logarithmic Detector (0.05/dB)
	3. Fast Back-off	5V(Back-off by 20~30dB), 0V(Normal Gain)
	4. Do Not Connect	
	5. Temperature Monitor	VT = 0.01 * Tc + 0.5 (V) Tc is Case Temperature in degC ± 5°C
	A1. Vcc	
	A2. GND	

2

ENVIRONMENTAL SPECIFICATIONS		
Parameter	Specification	Remark
Operating Case Temperature	-20 ~ +70 °C	
Storage Temperature	-40 ~ +85 °C	

MECHANICAL SPECIFICATIONS		
Parameter	Specification	Remark
Dimension	180 x 95 x 25 mm	
RF Input / Output Connector	SMA Female	
Control Connector	7W2 Male	
Cooling	Adequate Heat-sink required	

Created	Printed	Document Number	Revision	Manufacturer
2014/12/11	2017/1/12		B	RFcore co.,Ltd
File : RCA0727H49C Short Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com


http://www.rfcore.com

Broadband High Power Amplifier

Product Name : RCA0727H49C

Doc. Name : Preliminary Short Spec.

Performance

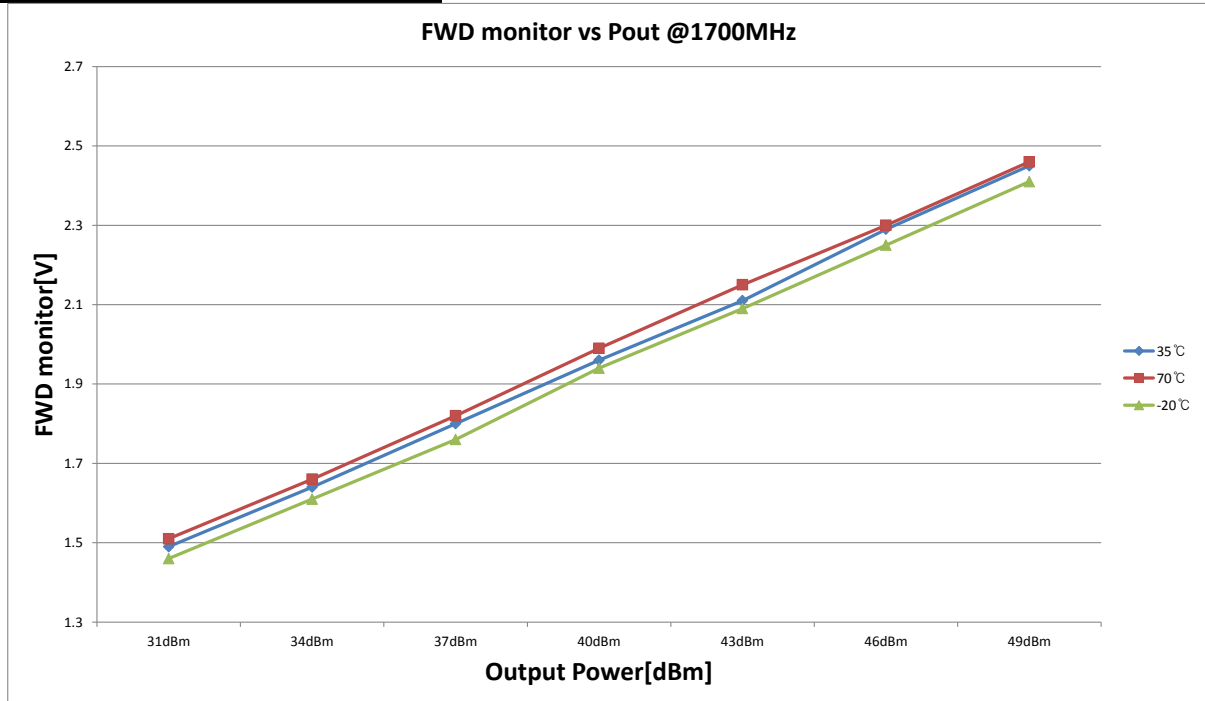

3

Confidential

Created	Printed	Document Number	Revision	Manufacturer
2014/12/11	2017/1/12		B	RFcore co.,Ltd
File : RCA0727H49C Short Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com


<http://www.rfcore.com>

Broadband High Power Amplifier

Product Name : RCA0727H49C

Doc. Name : Preliminary Short Spec.

MECHANICAL DRAWING

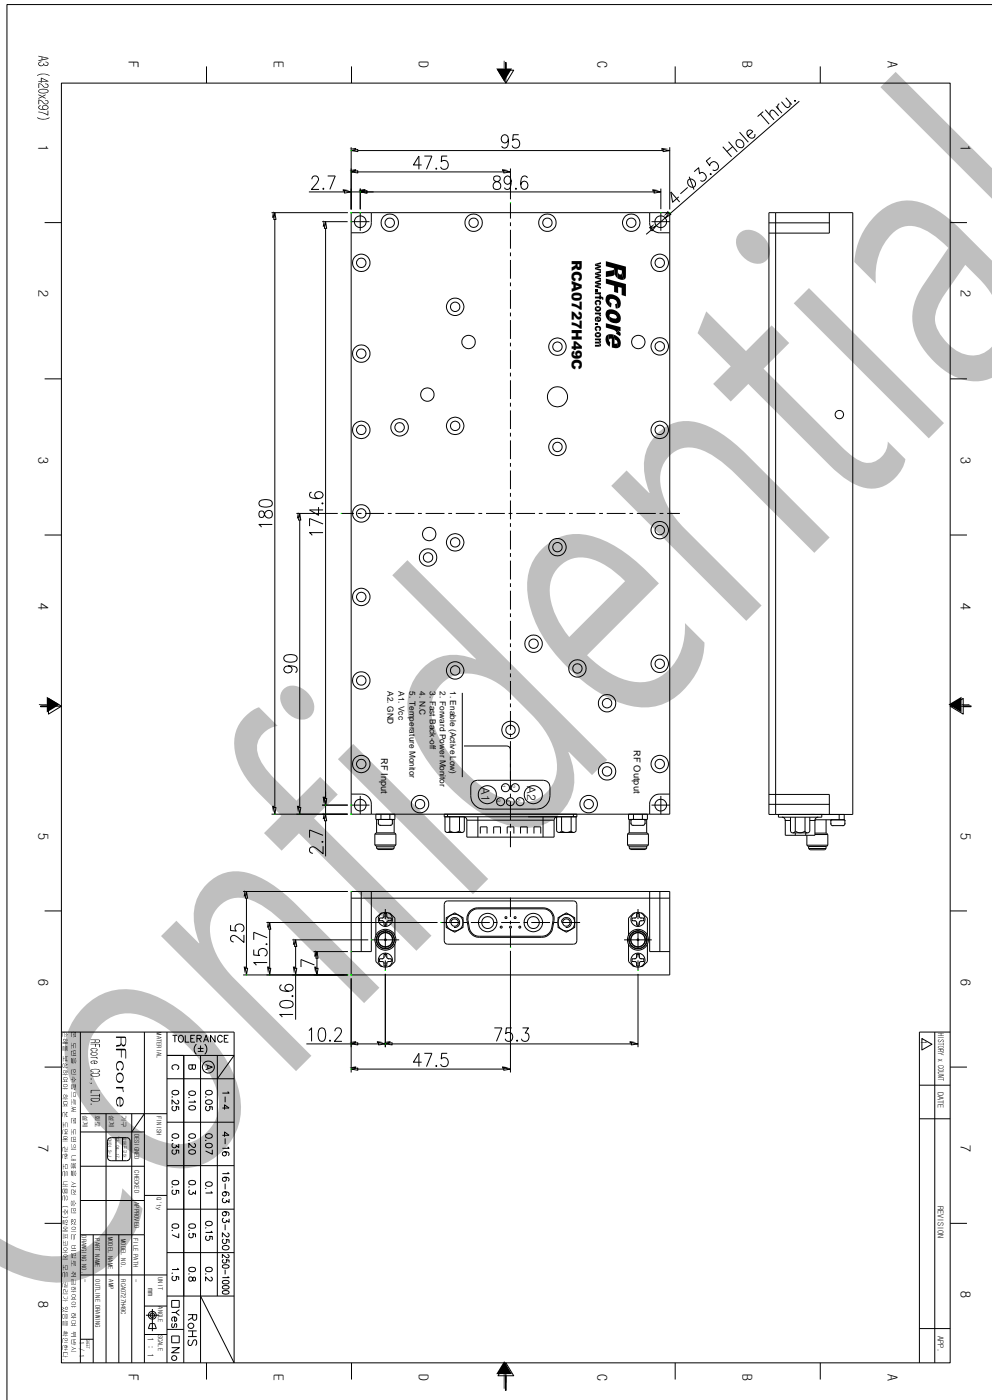

DRAWING REFERNECE: This is subject to change without notice.

Created	Printed	Document Number	Revision	Manufacturer
2014/12/11	2017/1/12		B	RFcore co.,Ltd
File : RCA0727H49C Short Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

http://www.rfcore.com