

Broadband High Power Amplifier

Product Name : RCA1922H47A, Code Name :

Doc. Name : Preliminary Short Spec.

<p align="center">Preliminary Short Specification for RCA1922H47A</p>

1

<p align="center">RESTRICTION ON USE, DUPLICATION, OR DISCLOSURE OF PROPRIETARY INFORMATION</p>
--

This document contains proprietary information, which is the sole property of RFcore co., LTD.
The document is submitted to the recipient for his use only.
By receiving this document the recipient undertakes not to duplicate the documents or to disclose in part of, or the whole of, any of the information contained herein to any third party without receiving beforehand, written permission from the submitting company.

Created	Printed	Document Number	Revision	Manufacturer
2015/1/20	2015/4/21		A	RFcore co.,Ltd
File : RCA1922H47A Short Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

<http://www.rfcore.com>

Broadband High Power Amplifier

Product Name : RCA1922H47A, Code Name :

Doc. Name : Preliminary Short Spec.

ELECTRICAL SPECIFICATIONS		@ 50 Ohms load, 28 Vdc, Tc = 35 °C
Parameter	Specification	Remark
Frequency Range	1900 ~ 2190 MHz	
Saturated Output Power	47 dBm min.	@ CW
Small Signal Gain @ Center frequency	47 ± 1.0 dB	Input level = -15dBm
Small Signal Gain Flatness	Peak to Peak 3.0 dB	Input level = -15dBm
Maximum Input Power for no damage	10 dBm max.	
Input VSWR	Less than 1.5 : 1	
Output VSWR	Less than 1.5 : 1	
DC Input Voltage	28 ± 1.0 Vdc	
Current Consumption	7 A max.	@ Pout = 47dBm
I/O Interface(D-Sub 9Pin Male)	1. Temperature Monitor	VT = 0.02*Tc + 1.0 (V) Tc is Case Temperature in degC ± 5°C
	2. Forward Power Monitor	4.0±0.2@47dBm, slope : 0.1V/dB Vpin2 = 4.0-(47-Pout)x0.1±0.2V
	3. GND	
	4. Reflected Power Monitor	Diode Detector
	5. VSWR Fail Alarm	Alarm : TTL High Reflected power = 40~43dBm (Vpin4=1.4±0.1V) @Fcenter
	6. Vcc	
	7. Vcc	
	8. GND	
	9. Enable(Active Low)	Pulled-up @ 5V with 10kohm

2

ENVIRONMENTAL SPECIFICATIONS		
Parameter	Specification	Remark
Operating Case Temperature	-20 ~ 70 °C	
Storage Temperature	-40 ~ 85 °C	

MECHANICAL SPECIFICATIONS		
Parameter	Specification	Remark
Dimension	110 * 90 * 25 mm	
Input / Output Connector	SMA Female	
Control Connector	D-Sub 9Pin Male	
Cooling	Adequate Heat-sink required	

Created	Printed	Document Number	Revision	Manufacturer
2015/1/20	2015/4/21		A	RFcore co.,Ltd
File : RCA1922H47A Short Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com


http://www.rfcore.com

Broadband High Power Amplifier

Product Name : RCA1922H47A, Code Name :

Doc. Name : Preliminary Short Spec.

MECHANICAL DRAWING

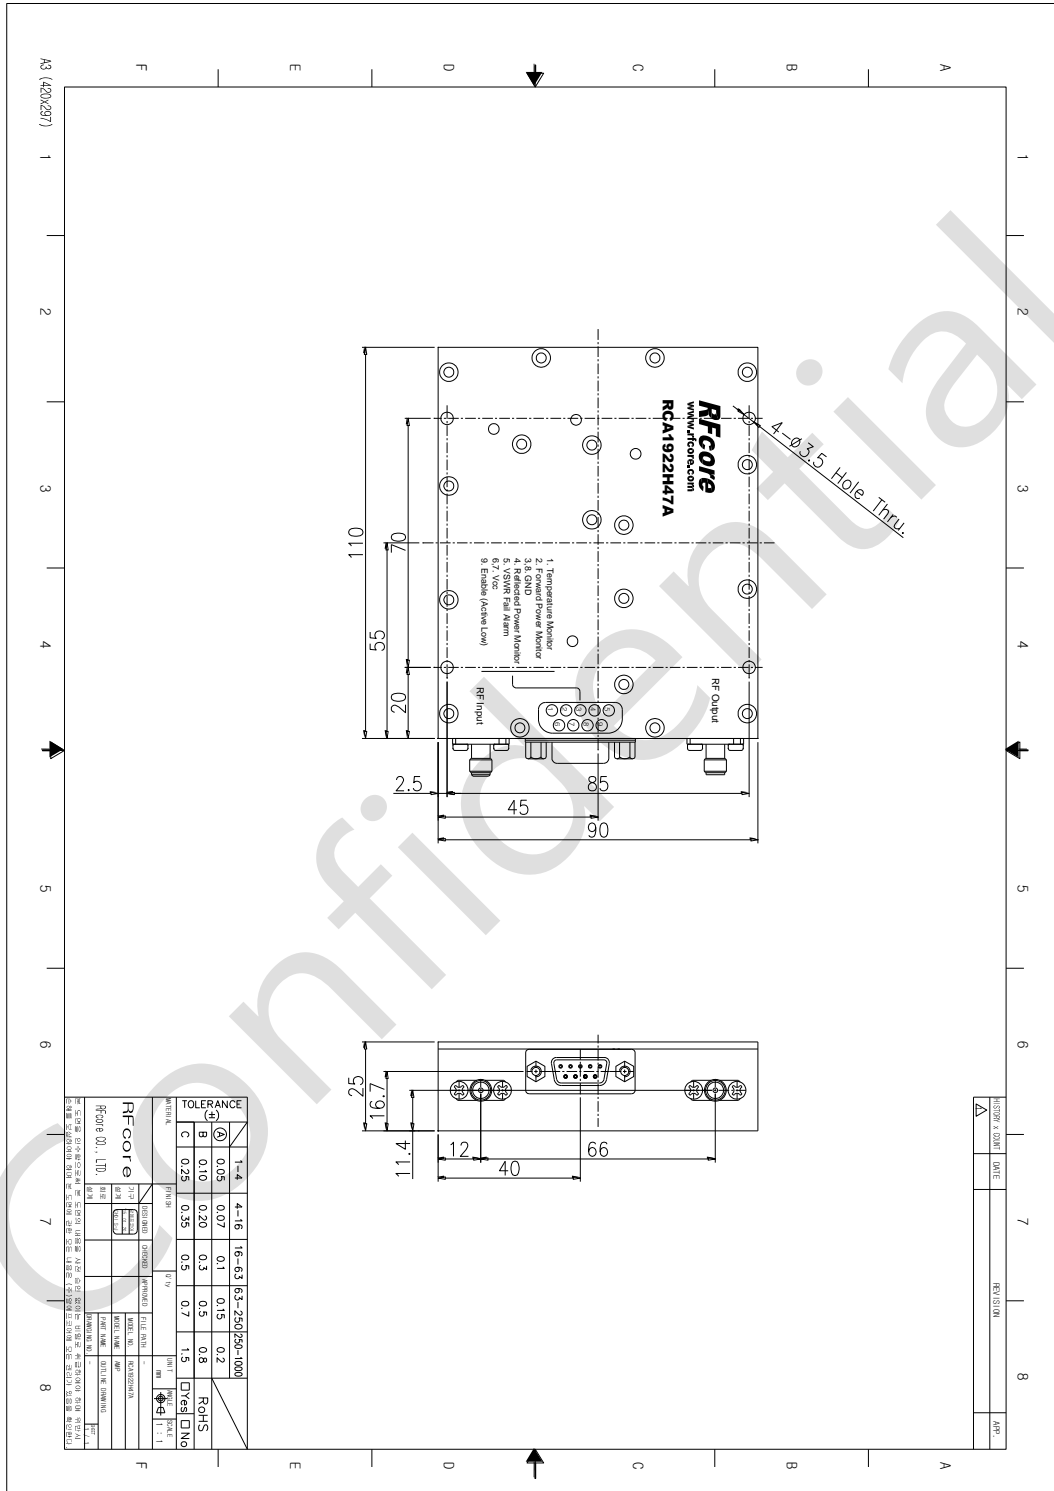

Created	Printed	Document Number	Revision	Manufacturer
2015/1/20	2015/4/21		A	RFcore co.,Ltd
File : RCA1922H47A Short Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

http://www.rfcore.com