

Rack Mountable System Amplifier

Product Name : RCA0820U50

Doc. Name : Preliminary Short Spec.

Preliminary Short Specification for RCA0820U50

1

RESTRICTION ON USE, DUPLICATION, OR DISCLOSURE OF PROPRIETARY INFORMATION

This document contains proprietary information, which is the sole property of RFcore co., LTD.

The document is submitted to the recipient for his use only.

By receiving this document the recipient undertakes not to duplicate the documents or to disclose in part of, or the whole of, any of the information contained herein to any third party without receiving before hand, written permission from the submitting company.

Created	Printed	Document Number	Revision	Manufacturer
2010/4/21	2012/6/25		A	<i>RFcore co.,Ltd</i>
File : RCA0820U50 Short Spe.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

<http://www.rfcore.com>

Rack Mountable System Amplifier

Product Name : RCA0820U50

Doc. Name : Preliminary Short Spec.

ELECTRICAL SPECIFICATIONS

Parameter	Specification	Remark
Frequency Range	800 ~ 2000 MHz	
Saturated Output Power	100 Watts min	
Input Power for Rated Output	0 dBm max	
Small Signal Gain	57 dB min	
Gain Flatness	± 2.5 dB max	
Input VSWR	2 : 1 max	
Harmonics	-15 dBc min @ 100 Watts	
Spurious Signal	-60 dBc max @ 100 Watts	
Primary Supply Voltage	220VAC	176 ~ 264VAC / 47 ~ 63 Hz
Power Consumption	700 Watts max @ 100 Watts	
RF Input Signal Format	CW	
Input / Output Impedance	50 Ohms nominal	

2

ENVIRONMENTAL SPECIFICATIONS

Parameter	Specification	Remark
Operating Ambient Temperature	0 ~ 50 °C	
Storage Temperature	-40 ~ 85 °C	

MECHANICAL SPECIFICATIONS

Parameter	Specification	Remark
Dimension	19" x 5.25" x 20" Max	
Weight	Less than 22 kg	
RF Input / Output Connector	N – Female	on the back of the system
Connector	D – Sub 9 Pin Male	on the back of the system
Cooling	Built – In Forced – Air System	

Created	Printed	Document Number	Revision	Manufacturer
2010/4/21	2012/6/25		A	RFcore co.,Ltd
File : RCA0820U50 Short Spe.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

http://www.rfcore.com

Rack Mountable System Amplifier

Product Name : RCA0820U50

Doc. Name : Preliminary Short Spec.

SELF PROTECTIONS		
Parameter	Specification	Remark
Input Overdrive	3 dBm \pm 1 dB	In case exceeding this limit amplifier back off gain automatically by about 15dB. Factory Reset
Over Temp Alarm	85 °C \pm 5 °C shutdown	Factory Reset
VSWR Alarm	Load VSWR over 3 : 1	Factory Reset
Over Power Alarm	53 dBm \pm 0.5 dB shutdown	Factory Reset

Created	Printed	Document Number	Revision	Manufacturer
2010/4/21	2012/6/25		A	RFcore co.,Ltd
File : RCA0820U50 Short Spe.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

<http://www.rfcore.com>


Rack Mountable System Amplifier

Product Name : RCA0820U50

Doc. Name : Preliminary Short Spec.

MECHANICAL DRAWING

4

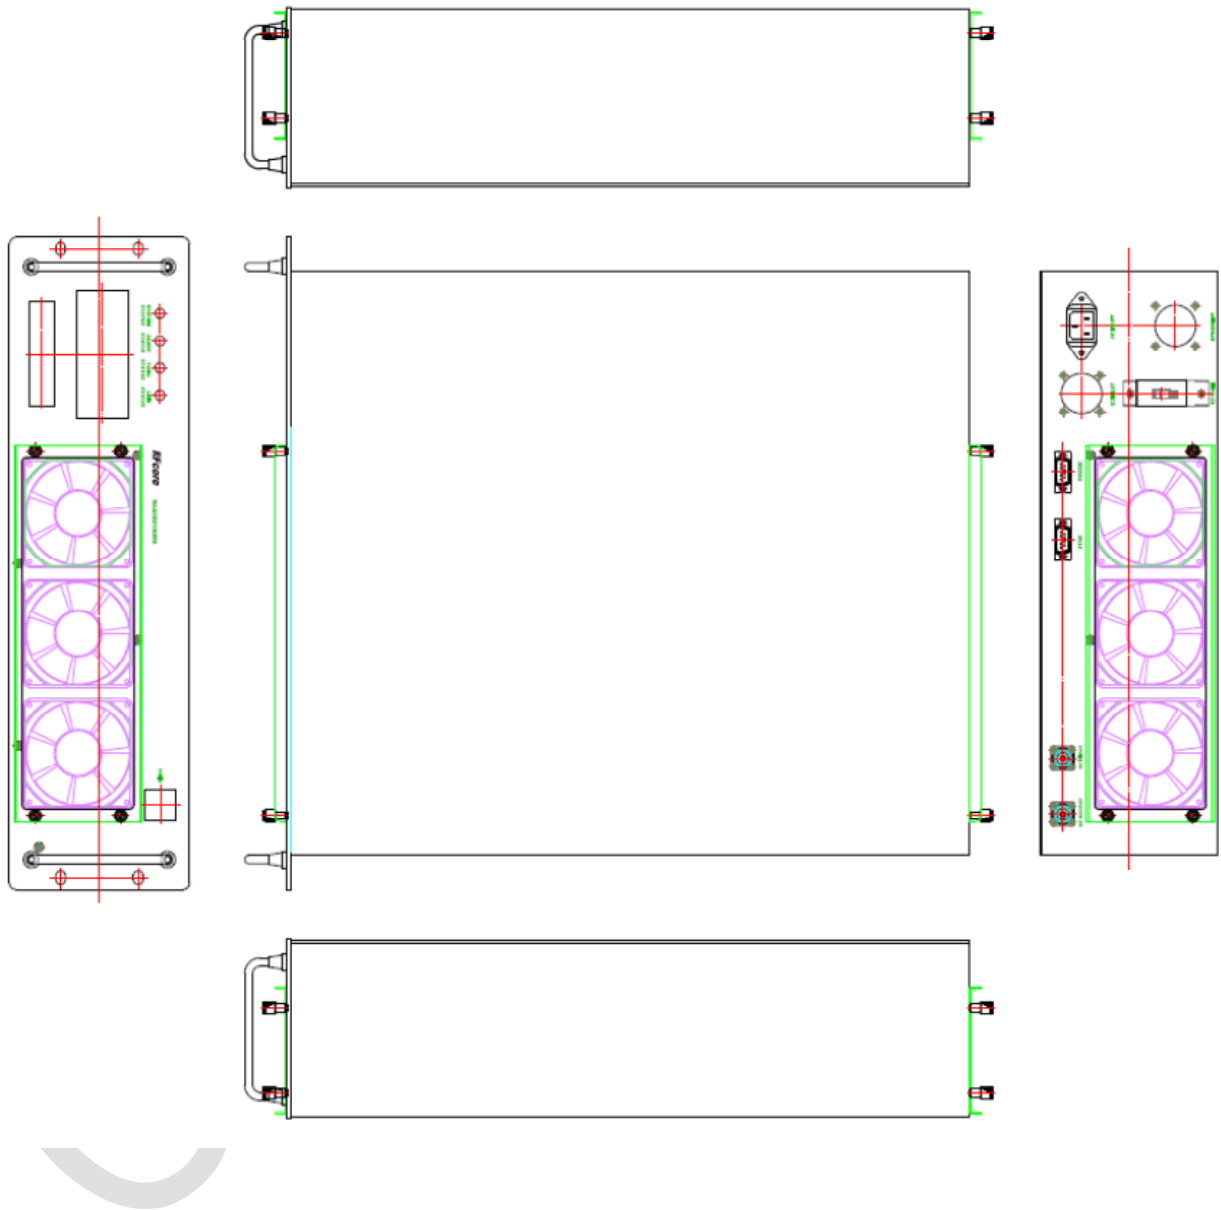

Created	Printed	Document Number	Revision	Manufacturer
2010/4/21	2012/6/25		A	RFcore co.,Ltd
File : RCA0820U50 Short Spe.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

<http://www.rfcore.com>