

Broadband High Power Amplifier

Product Name : RCA0727H40E0, Code Name :

Doc. Name : General Spec.

RoHs
compliant

General Specification for RCA0727H40E0

1

RESTRICTION ON USE, DUPLICATION, OR DISCLOSURE OF PROPRIETARY INFORMATION

This document contains proprietary information, which is the sole property of RFcore co., LTD.

The document is submitted to the recipient for his use only.

By receiving this document the recipient undertakes not to duplicate the documents or to disclose in part of, or the whole of, any of the information contained herein to any third party without receiving before hand, written permission from the submitting company.

Created	Printed	Document Number	Revision	Manufacturer
2019/3/13	2019/5/30		D	RFcore co.,Ltd
File : RCA0727H40E0 General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

<http://www.rfcore.com>

Broadband High Power Amplifier

Product Name : RCA0727H40E0, Code Name :

Doc. Name : General Spec.

ELECTRICAL SPECIFICATIONS		@ 50 Ohms load, 28 Vdc, Tc = 35 °C
Parameter	Specification	Remark
Frequency Range	758 ~ 2690 MHz	
Saturated Output Power	40 dBm min.	@ CW, 50 ohms load
Small Signal Gain	44 dB min.	Input Level = - 15 dBm
Small Signal Gain Flatness	Peak to Peak 5 dB	Input Level = - 15 dBm
Large Signal Gain	40 dB min.	Input Level = 0 dBm
Large Signal Gain Flatness	Peak to Peak 3 dB	Input Level = 0 dBm
Maximum Input Power for no damage	7 dBm	@ CW
Input VSWR	Less than 2.0 : 1	
Maximum load VSWR for amplifier working	3.5 : 1	Works with degraded performance.
Maximum Output Load Condition for survival	Infinite VSWR	Take a look video http://www.youtube.com/watch?v=1kLBxPf4--M You can look for this video in youtube.com with keyword 'Rfcore' or 'VSWR protection'
On/Off Switching Time	1 usec typ.	
DC Input Voltage	28 ± 1 Vdc	
Current Consumption	1.5 A max.	Eff. ≥ 23 % @ Pout = 10W CW, 50 ohms load
RF Input Signal Format	CW	

2

Created	Printed	Document Number	Revision	Manufacturer
2019/3/13	2019/5/30		D	RFcore co.,Ltd
File : RCA0727H40E0 General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

<http://www.rfcore.com>

Broadband High Power Amplifier

Product Name : RCA0727H40E0, Code Name :

Doc. Name : General Spec.

Interface Pin Description		
Connector	Description	Specification
I/O Interface(D-Sub 9Pin Male)	1. Enable(Active Low)	(Enable = 0V, Disable = 5V) pull-up @ 5V with 10k ohm
	2. Forward Power Monitor	Logarithmic Detector(0.05V/dB)
	3. VSWR Fail Alarm	TTL HIGH(5V) @ high VSWR VSWR alarm will be activated at a certain ratio between 4 and infinite VSWR. The alarm is not latched signal.
	4. Reflected Power Monitor	Logarithmic Detector(0.05V/dB)
	5. Temperature Monitor	$VT = 10(mV) * Tc(^{\circ}C) + 500(mV)$, $Tc = \text{Case Temperature} \pm 5^{\circ}C$
	6. Vcc	
	7. Vcc	
	8. GND	
	9. GND	

3

ENVIRONMENTAL SPECIFICATIONS		
Parameter	Specification	Remark
Operating Case Temperature	-30 ~ +75 °C	At a hottest point of the mechanical case of amplifier module
Storage Temperature	-40 ~ +85 °C	

MECHANICAL SPECIFICATIONS		
Parameter	Specification	Remark
Dimension	110 * 90 * 25 mm	w/o connectors
Weight	Less than 450 g	
RF Input Connector	SMA Female	
RF Output Connector	SMA Female	
I/O Interface Connector	D-Sub 9Pin Male	
Cooling	Adequate Heat-sink required	

Created	Printed	Document Number	Revision	Manufacturer
2019/3/13	2019/5/30		D	RFcore co.,Ltd
File : RCA0727H40E0 General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com


http://www.rfcore.com

Broadband High Power Amplifier

Product Name : RCA0727H40E0, Code Name :

Doc. Name : General Spec.

MECHANICAL DRAWING

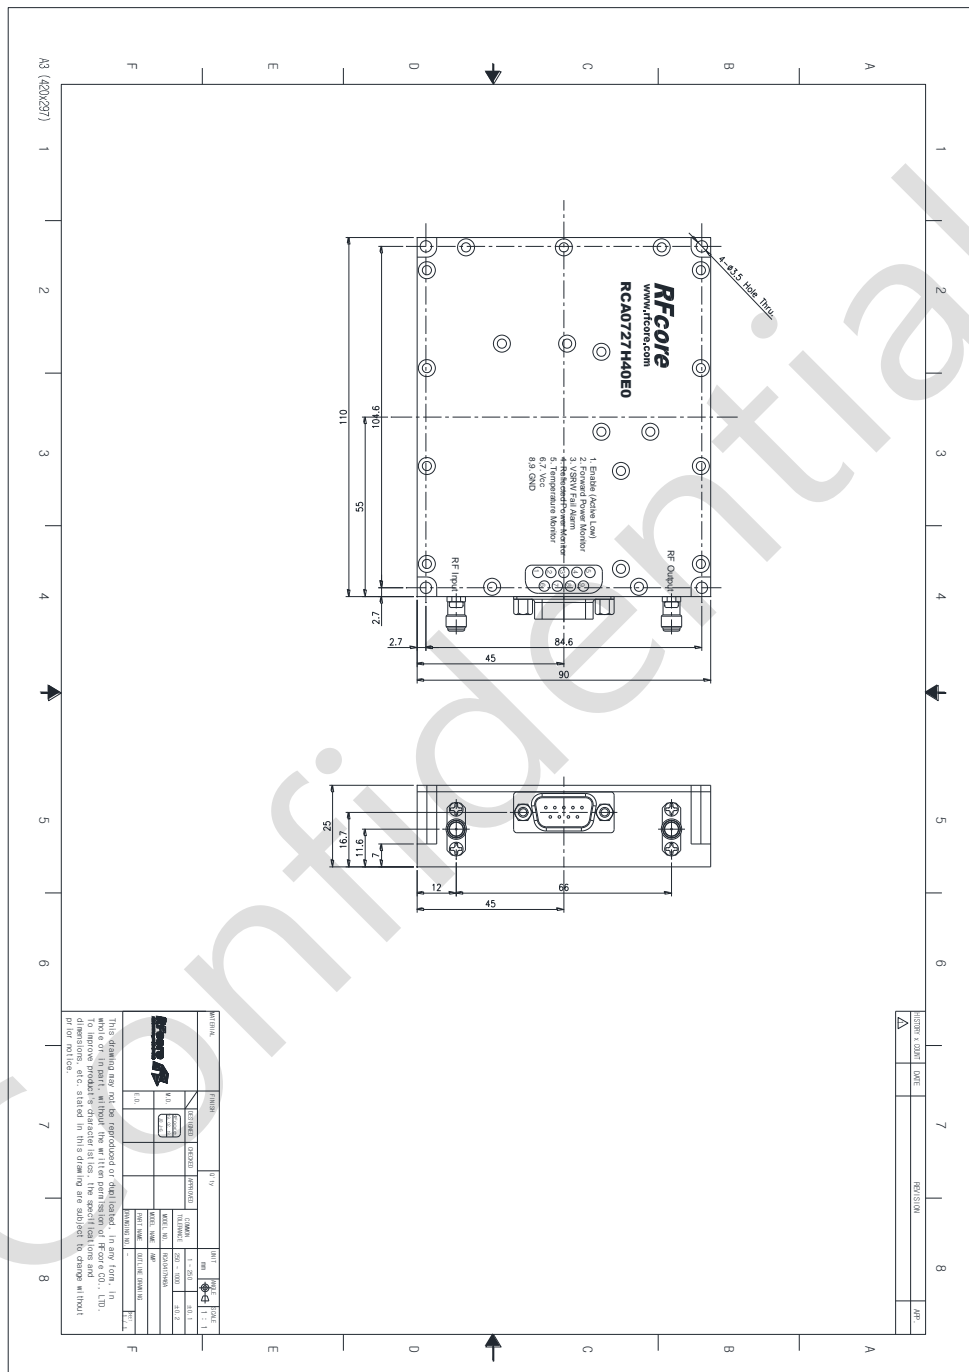

DRAWING REFERNECE: This is subject to change without notice.

Created	Printed	Document Number	Revision	Manufacturer
2019/3/13	2019/5/30		D	RFcore co.,Ltd
File : RCA0727H40E0 General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

http://www.rfcore.com